XARALYN®

(ala



Decorative Fireplaces











Ambiance



Compatible with:



Bio ethanol burner XL (8014LS)





Electric

Cadiz







H 950 | W 980 | D 375 mm



H 950 | W 980 | D 375 mm





Compatible with:

















Albany

Built-in unit L

Built-in unit L with stone effect

Built-in unit L

with medallion

Trivero 70 LED fire Lucius LED fire Built-in unit Cassette 600

Cadiz Corner

Kos







Compatible with:













Built-in unit L

Built-in unit L with stone effect

Built-in unit L with medallion Trivero 70 LED fire

Lucius LED fire

Built-in unit Cassette 600

Albany

Kos Corner



Kreta & Kreta mini



Compatible with:





Built-in unit L

with stone effect





Built-in unit L with medallion



Trivero 70 LED fire



Lucius LED fire



Built-in unit Cassette 600



Albany



Louis



Compatible with:







Built-in unit L with stone effect



Built-in unit L with medallion



Trivero 70 LED fire



Lucius LED fire



Built-in unit Cassette 600



Albany



Marvik



Compatible with:





Built-in unit L

Trivero 70 LED fire



Built-in unit Cassette 600



Albany



Milos



Natural stone F02 Finish: Polished

H 970 | W 995 | D 340 mm

Compatible with:



Bio ethanol burner S (4114LB)



Trivero 70 LED fire





Milano



The Milano is including:



Bio ethanol burner S (4114S)

Nuoro

The Nuoro is compatible with:



Bio ethanol burner L (5820LB)





Nero



Compatible with:





Built-in unit L

Built-in unit L with stone effect



Built-in unit L with medallion



Trivero 70 LED fire



Lucius LED fire



Built-in unit Cassette 600



Albany



Santos



Finish: Polished

H 1000 | W 1300 | D 470 mm

Compatible with:





Bio ethanol burner L (5820LB)









Todos



Compatible with:



Electric

Bio ethanol burner S (4114LB)





Elin



MDF (RAL 9010)

H 450 | W 1800 | D 445 mm

Compatible with:





Bio ethanol burner S (4114LS)





Black aluminium Including Bio ethanol burner XL (8013LS) Wall-mounted model

H 600 | W 950 | D 166 mm



Black aluminium Including Bio ethanol burner XL (8013LS)

H 640 | W 950 | D 400 mm



12 all al. Silver aluminium

Including Bio ethanol burner XL (8013LS) Wall-mounted model


H 600 | W 950 | D 166 mm







Cuneo

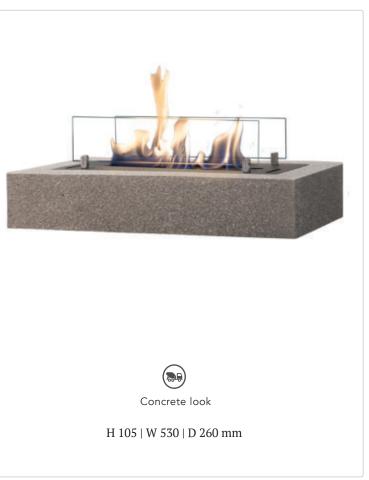

Including:



Bio ethanol burner S (4114LS)



Woody



3 Resin Including Bio ethanol burner S (4114LS)

H 125 | W 495 | D 230 mm

Including:



Bio ethanol burner S (4114LS)



Lasize



Compatible with:





Bio ethanol burner L (5820LB)


c





THE -

Shigo

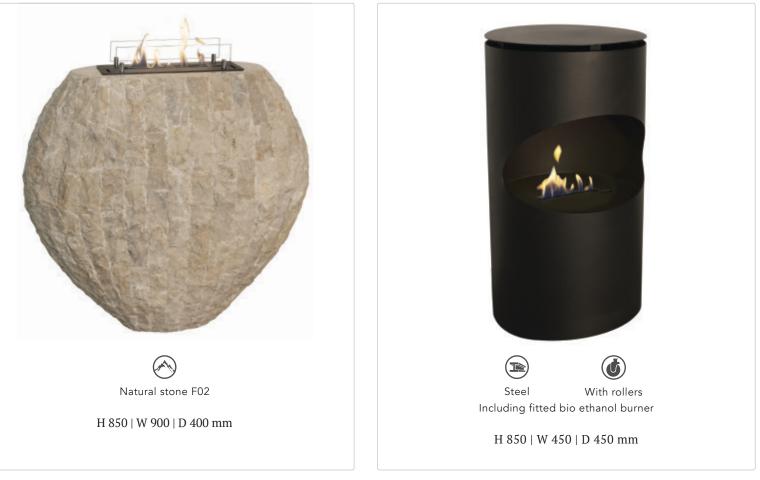

Shigo is including:



Bio ethanol burner S (4114LB)

Silo



Disegno 3D LED wall



Including:

Electric



Levico 90 3D LED

Disegno 3D LED






MDF (RAL 9005) Including Bio ethanol burner S (4114B)

H 650 | W 970 | D 190 mm



Concrete look Including Bio ethanol burner S (4114B)

H 650 | W 970 | D 190 mm

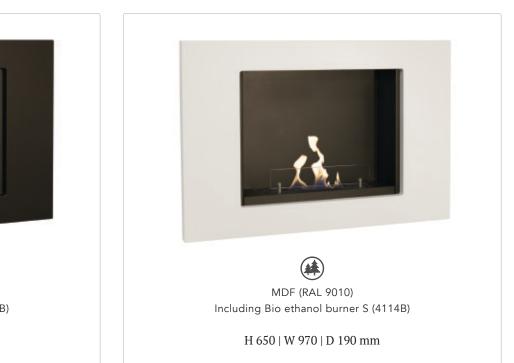





Broken stone Including Bio ethanol burner S (4114B)

H 650 | W 970 | D 190 mm



Nova



The Nova concrete look is compatible with:



Electric

Bio ethanol burner S (4114LB)





H 620 | W 600 | D 300 mm




The Nova MDF is including:



Cassette 400

Cassette 400

Quero

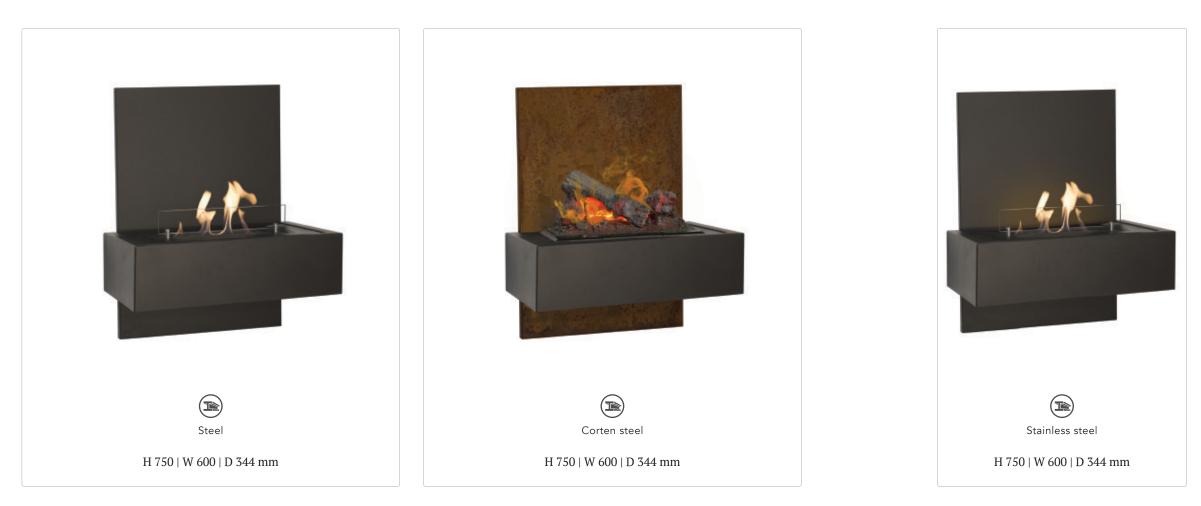

Compatible with:






Bio ethanol burner S (4114LB)

Cassette 400



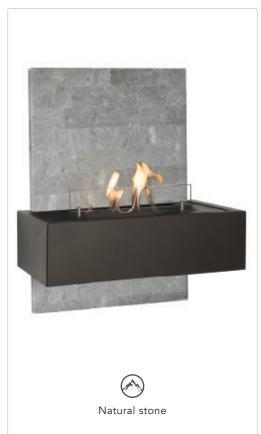



H 750 | W 600 | D 344 mm

H 750 | W 600 | D 344 mm

rivero

contraction of the second second



Wall-surround Trivero comes standard with basalt split.

- Maintenance-free
- Functions with LED lights
- Adjustable flames
- Remote control



Trivero 130 H 465 mm | W 1270 mm | D 140 mm Consumption 15 Watt



Trivero 180 H 465 mm | W 1830 mm | D 140 mm Consumption 20 Watt

and the first many the case was the first many many shall be descent to the second second second second second

Trivero 240 H 465 mm | W 2415 mm | D 130 mm Consumption 25 Watt

- Thermostat
- Heating: 0 700 1400 Watt (to be programmed)
- Timer function





Umbria



The Umbria is including:




Bio ethanol burner L (5820B)

Lucca

The Lucca is including:





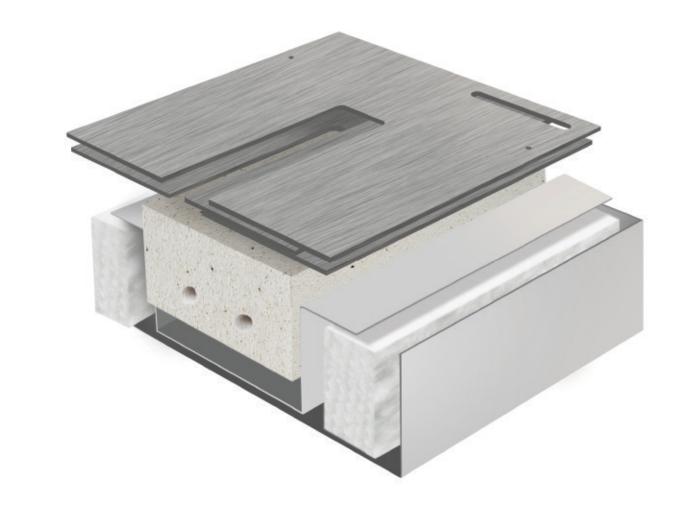

Safety comes first with Xaralyn. The filling opening is separate from the opening of the fire and due to the built in safety system it is impossible to fill the bio ethanol burners while they are lit.

• The fire is created by gas that is formed when bio ethanol is exposed to the air. Due to the gradual release of the gas, there is a constant combustion, making this the bio ethanol burner very economical in use and the safest on the market. • The complete bio ethanol burner is made of high quality stainless steel

• Ceramic stone absorbs the bio ethanol

• Ceramic wool in the outer case absorbs excess bio ethanol in case of overfilling







EN 16647:2015

DIN 4734-1

Bio ethanol burner S





(4114LB) With lip



H 80 | W 408 | D 137 mm Top plate (lip): W 428 | D 157 mm

Burner contents:	± 1 liter
Burning time:	± 3 hours
Consumption per hour:	± 0,30 liter
Heat output:	± 2 KW

H 80 | W 408 | D 137 mm Top plate (lip): W 428 | D 157 mm

Burner contents:	± 1 liter
Burning time:	± 3 hours
Consumption per hour:	± 0,30 liter
Heat output:	± 2 KW

Bio ethanol burner S





Burner contents:	± 1 liter
Burning time:	± 3 hours
Consumption per hour:	± 0,3 lite
Heat output:	± 2 KW

All bio ethanol burners contain a patented Clean fire System ceramic core. This core absorbs the bio ethanol completely, which makes it impossible for the fuel to leak or spill.


Bio ethanol burner M





H 80 | W 405 | D 200 mm

Burner contents:	± 1,5 lite
Burning time:	± 3 hours
Consumption per hour:	± 0,3 lite
Heat output:	± 2,5 KW



Included with all burners

- Quickstart
- Manual
- Glass screens
- Connectors
- Lighter
- Funnel
- Operating sticks



Bio ethanol burner L







H 80 | W 575 | D 198 mm Top plate (lip): W 597 | D 220 mm

Burner contents:	± 2 liters
Burning time:	± 3,5 hours
Consumption per hour:	± 0,5 liters
Heat output:	± 3KW



H 80 | W 575 | D 198 mm Top plate (lip): W 597 | D 220 mm

Burner contents:	± 2 liters
Burning time:	± 3,5 hours
Consumption per hour:	± 0,5 liters
Heat output:	± 3KW


Bio ethanol burner L






Burner contents:	± 2
Burning time:	±3,
Consumption per hour:	± 0,
Heat output:	± 3

Bio ethanol burner XL

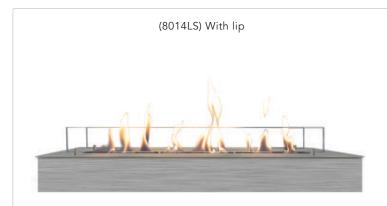

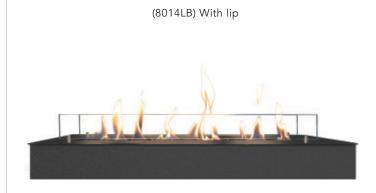






H 80 | W 800 | D 137 mm Top plate (lip): W 820 | D 157 mm

Burner contents:	± 2,5 liter
Burning time:	± 3,5 hours
Consumption per hour:	± 0,55 liter
Heat output:	± 3,5KW

H 80 | W 800 | D 137 mm Top plate (lip): W 820 | D 157 mm

Burner contents:	± 2,5 liter
Burning time:	± 3,5 hours
Consumption per hour:	± 0,55 liter
Heat output:	± 3,5KW

Bio ethanol burner XXL

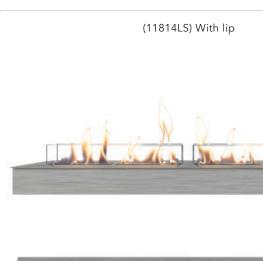

H 84 | W 1180 | D 137 mm Top plate (lip): W 1200 | D 157 mm

Burner contents:	± 3,5 liter
Burning time:	± 3,5 hours
Consumption per hour:	± 0,65 liter
Heat output:	± 4,4 KW



H 84 | W 1180 | D 137 mm Top plate (lip): W 1200 | D 157 mm

Burner contents:	± 3,5 liter
Burning time:	± 3,5 hours
Consumption per hour:	± 0,65 liter
Heat output:	± 4,4 KW

Built-in unit S

Built-in unit L







H 690 | W 500 | D 210 mm

Including Bio ethanol burner M (4120B)

H 712 | W 680 | D 210 mm

Including Bio ethanol burner L (5820B)

H 744 | W 690 | D 225 mm

With stone Effect Including Bio ethanol burner L (5820B)





H 744 | W 690 | D 225 mm

With medallion Including Bio ethanol burner L (5820B)



Built-in unit XL





H 538 | W 947 | D 217 mm

Including Bio ethanol burner XL (8014LS) Removable backwall

Optional with Finishing frame

Built-in unit XXL



H 536 | W 1330 | D 217 mm

Including Bio ethanol burner XXL (11814LS) Removable backwall

Optional with Finishing frame

Built-in profiles







H 3 | W 530 | D 260 mm

Available in black or brushed stainless steel

Including bio ethanol burner S (4114L)








H 3 | W 695 | D 320 mm

Available in black or brushed stainless steel

Including bio ethanol burner L (5820L)

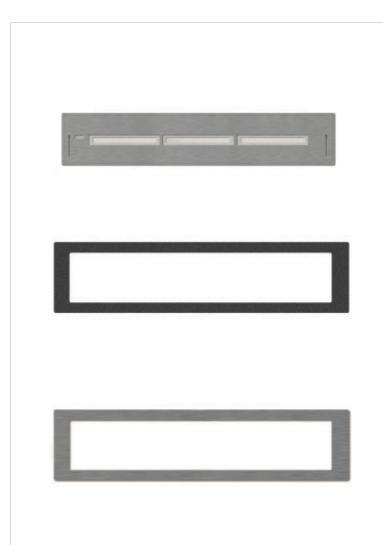

H 3 | W 920 | D 260 mm

Available in black or brushed stainless steel

Including bio ethanol burner XL (8014L)



The built-in profile is designed for use in combination with the bio ethanol burner. The profile protects your project or furniture against the heat that is produced by the bio ethanol burner and makes installation easier.

Bio ethanol CL100





Bio ethanol is entirely comprised of biological products, and hence the combustion of bioethanol results in cleaner emissions (carbon dioxide, steam and heat). Carbon dioxide is absorbed by plants and processed via photosynthesis to help the plant grow. This cycle of creation and energy combustion means bioethanol could potentially be a carbon neutral fuel source.



Castello



H 730 | W 740 | D 320 mm

Can be mounted on a wall or be used as a built-in fire

- Consumption 25 Watt
- Control with app
- Maintenance-free
- Remote control
- Thermostat
- Functions with LED lights
- Adjustable flames
- Heating: 0 600 1200 Watt (to be programmed)



Levico 90







H 410 | W 915 | D 248 mm

- Consumption 15 Watt
- Maintenance-free
- Functions with LED lights
- Adjustable flames
- Remote control
- Timer
- Heating: 0 400 800 Watt (to be programmed)



Trivero 70



H 690 | W 660 | D 197 mm

- Consumption 10 Watt
- Maintenance-free
- Including basalt split
- Functions with LED lights
- Adjustable flames
- Remote control
- Thermostat
- Heating: 0 400 800 Watt (to be programmed)

Optional for the Trivero 70

Make it deeper. Included with purchase of a surround.



Resin Logset





Elski



H 665 | W 470 | D 205 mm

- Consumption 10 Watt
- Maintenance-free
- Remote control
- Thermostat
- Functions with LED lights
- Adjustable flames
- Heating: 0 600 1200 Watt (to be programmed)

Lucius





H 610 | W 620 | D 195 mm

- Consumption 10 Watt
- Maintenance-free
- Remote control
- Thermostat
- Functions with LED lights
- Adjustable flames
- Heating: 0 700 1400 Watt (to be programmed)

73



Trivero 90



H 560 | W 1040 | D 140 mm

- Consumption 15 Watt
- Maintenance-free
- Including basalt split
- Functions with LED lights
- Adjustable flames
- Remote control





Basket Cassette 400

Basket Cassette 600

Built-in unit 600







H 330 | W 405 | D 216 mm

- Consumption 200 Watt
- Adjustable flame image
- Remote control

H 340 | W 564 | D 218 mm

- Consumption 200 Watt
- Adjustable flame image
- Remote control

H 720 | W 700 | D 275 mm

Consumption 200 Watt

- Adjustable flame image
- Remote control

Albany



H 705 | W 640 | D 295 mm

- Consumption 220 Watt
- Adjustable flame image
- Remote control with LCD display
- LED logset
- Heating: 0 750 1500 Watt (to be programmed)
- Including side cover

Logset 6 pieces

Logset 10 pieces

White pebbles 5kg







Luxury logset

Logset Resin

Crackling sound effect box **Electric lighter**









Bio ethanol Trivero Water Vapour

Basalt split 4kg

The crackling sound effect box gives the sound effect of a true fire and can be used with your electric or ceramic fire. The crackling sound box copies the sound of an open fire with crackling logs. The volume of the sound effect can be adjusted.

H 50 | W 60 | D 60 mm



XARALYN @

 $\mbox{\sc A}$ Vreekesweid 30

1721 PR Broek op Langedijk The Netherlands E info@xaralyn.com

W www.xaralyn.com

